

**A high-performance, multilayer modular switching platform for the most demanding Enterprise environments, driving secure, non-stop delivery of business applications.**

## OVERVIEW

The 3Com® Switch 8800 Family of intelligent, multilayer modular LAN switches is ideal for enterprise environments where non-stop availability of critical applications and the highest performance, security, and granular control are required.

These switches provide unparalleled investment protection for the enterprise with industry-leading scalability and flexible modular architecture, delivering high performance Gigabit and 10-Gigabit switching and routing.

The Switch 8800 Family enables end-to-end connectivity and network application control with three available chassis models—featuring 14, 10, and 7 slots—providing flexibility based on the switching capacity and interface port density required:

- > Switch 8814: Highest capacity, 14-slot chassis, with two slots supporting dual load-sharing switch fabrics and 12 slots for any combination of switching I/O modules, supporting up to 48 10-Gigabit ports or 576 10/100/1000 ports.
- > Switch 8810: 10-slot chassis, with two slots for load-sharing switch fabrics and eight slots for switching I/O modules, supporting up to 32 10-Gigabit ports or 384 10/100/1000 ports.
- > Switch 8807: 7-slot chassis, with two slots for load-sharing switch fabrics and five slots for switching I/O modules, supporting up to 20 10-Gigabit ports or 240 10/100/1000 ports.

All chassis models share the same future-proof architecture, scalable up to 1.44 Terabits per second capacity, for maximum long term investment protection.



## KEY BENEFITS

### INTELLIGENT ENTERPRISE INFRASTRUCTURE

Enterprise network infrastructure is evolving dramatically, from the core to the edge of the network, with greater demands being placed on the entire network system to deliver:

- > Highly intelligent, non-stop transport of data and access to information resources
- > Guaranteed quality of service (QoS) for mission critical business applications, including Voice over IP (VoIP), storage, and video
- > Comprehensive security for network access control, encryption, and protection of corporate resources
- > Unprecedented levels of management visibility and granular control
- > An open, standards-based architecture to enable seamless growth and future investment without proprietary lock-ins

The 3Com Switch 8800 has been designed to stand up to these challenges for the most demanding enterprise environments. The Switch 8800 delivers a comprehensive infrastructure solution that is highly resilient, intelligent, secure, and scalable—one that is capable of adapting to the evolving needs of the enterprise.

### RESILIENT ARCHITECTURE FOR BUSINESS CONTINUITY

With a highly resilient modular architecture, the Switch 8800 Family enhances business continuity by helping ensure availability of convergent enterprise applications including data, voice, and video. All critical system components including power supplies, cooling fans, and switch fabrics are redundant and hot-swappable, minimizing any impact to the enterprise in the event a single component should fail.

All Switch 8800 chassis models support the option for dual switch fabrics providing high resiliency and rapid failover—less than one second—to deliver the highest possible availability of network resources. With dual switch fabrics installed, both fabrics are active and load-sharing, ensuring resiliency as well as doubling effective system performance.

Changes in network topology due to device or link failures can lead to disruption of service for critical business applications. Rapid recovery from such topology changes is achieved with features such as Multiple Spanning Tree Protocol (MSTP), Rapid Spanning Tree Protocol (RSTP), Open Shortest Path First (OSPF) routing, and Virtual Router Redundancy Protocol (VRRP).

### APPLICATION CONVERGENCE: QOS AND POWER OVER ETHERNET

Real-time applications such as voice over IP (VoIP) demand high Quality of Service (QoS) and differentiated service levels to function properly. The 3Com Switch 8800 Family provides robust QoS and advanced traffic management features, allowing critical applications to be prioritized and serviced as the needs of the organization dictate.

Additionally, the Switch 8800 supports industry-standard IEEE 802.3af Power over Ethernet (PoE) to provide both electrical power and network connectivity to PoE-capable devices, such as IP telephones and wireless access points, making the switches ideal for large-scale enterprise edge deployment. PoE simplifies network deployment by eliminating the need for separate data and power infrastructures, significantly reducing installation and maintenance costs. PoE also provides greater flexibility for moves, adds, and changes on the network, as powered network devices can be deployed or relocated anywhere an Ethernet connection is available without requiring a dedicated power outlet.

## KEY BENEFITS (CONTINUED)

### ENTERPRISE-WIDE SECURITY

Security is paramount in today's enterprise, and as dependency on information technology continues to rise, so does the need for highly secure IT systems and infrastructure. The 3Com Switch 8800 Family features advanced security capabilities, including user and device authentication, policy-based access controls, encrypted system management access, and quarantine enforcement for containment of vulnerabilities and deliberate attacks.

The Switch 8800 provides secure network access using standard IEEE 802.1X along with user- and device-based access control capabilities. RADIUS support enables user authentication, while the switch is also able to authenticate attached devices (printers, for example) via their MAC address for an additional level of endpoint security. Port- and VLAN-based Access Control Lists (ACLs) and dynamic traffic filtering capabilities can be deployed to further control access to network resources.

Additional security measures are enforced on access to switch management utilities via Secure Shell version 2 (SSHv2) and SNMPv3 with authentication and encryption of network management traffic.

The Switch 8800 family functions as an integral part of the 3Com Quarantine Protection solution to automate containment of security threats on the enterprise network. 3Com Quarantine integrates the industry-leading TippingPoint™ Intrusion Prevention System with switch-based endpoint enforcement at the network edge.

### SCALABLE PERFORMANCE

With its 1.44 Terabits-per-second-capable backplane and wire-speed switching capacity, the Switch 8800 provides exceptional scalability for core, data center, distribution, and edge environments within the enterprise. System performance and connectivity options can be tailored to each environment with a wide selection of switching modules, scaling up to 48 10-Gigabit ports or 576 Gigabit ports in a single chassis.

The flexible design of the Switch 8800 allows for any combination of switching modules to be used in a single system, allowing easy expansion of network capacity, accommodating a range of port densities and media types for 10-Gigabit and Gigabit Ethernet.

Installation of the optional second switch fabric increases performance from 360 Gbps to 720 Gbps, as the fabrics are load-sharing. Each switching I/O module provides on-board local multilayer switching, maximizing system performance and application response times; adding modules increases the aggregate system performance, to a maximum Layer 2/3 switching capacity of 428 Mpps. In addition, the backplane is designed to accommodate higher-performing switch fabrics.

Standards-based link aggregation (via IEEE 802.3ad) allows scalable, high-bandwidth interconnectivity between network devices, with the ability to aggregate multiple Gigabit or 10-Gigabit links together as a single "trunk". Link aggregation of ports is supported across modules within the Switch 8800 for virtually non-stop network availability.

## KEY BENEFITS (CONTINUED)

### PRIORITIZATION AND TRAFFIC MANAGEMENT

Eight priority queues per port enable standard IEEE 802.1p Class of Service / Quality of Service (CoS/QoS). Protocol filtering and bandwidth rate limiting capabilities allow the Switch 8800 to enforce port-based controls for efficient use of network resources and prioritization of business-critical or time-sensitive applications, including Voice over IP (VoIP).

For example, protocols associated with key business applications can receive prioritized, high-bandwidth service, while protocols associated with non-critical (or even undesirable) applications can receive lower priority and bandwidth resources, or be blocked completely.

### STANDARDS BASED INTEROPERABILITY AND INVESTMENT PROTECTION

Enterprises today rely on open standards-based technology solutions to enable interoperability among new and existing systems, and to ensure that today's investments will continue to provide value well into the future without being locked-in to a particular vendor's products or technology.

3Com has designed the Switch 8800 with an open architecture, facilitating seamless growth and migration based on widely accepted international standards, free from costly lock-ins and the restrictions of proprietary approaches.

3Com's standards-based design philosophy—inherent in the Switch 8800 and all other 3Com products—provides investment protection as well as the flexibility to deploy “best-in-class” technology solutions which leverage industry standards.

### ENTERPRISE CLASS MANAGEMENT AND CONTROL

The Switch 8800 system features independent channels for data and management control. A dedicated data channel provides high-speed data switching and packet forwarding, while a separate management channel provides control, monitoring, route learning and distribution. A comprehensive set of management features allows the Switch 8800 to provide enterprise-wide visibility and control to IT staff for configuration, network monitoring and advanced troubleshooting capabilities.

Management features are accessible via an intuitive command line interface (CLI), as well as by SNMP, with hierarchical access controls and password protection for secure management access. Additional management security is provided through user authentication and data encryption capabilities of SNMPv3 and SSHv2, further reducing the likelihood of unauthorized access or snooping of management traffic.

## KEY BENEFITS (CONTINUED)

### ETHERNET METRO AREA NETWORK

Ethernet Metro Area Networks (MANs) offer enterprises a compelling solution for linking diverse sites together over metropolitan area distances into a seamless Ethernet switched network. The simplicity and affordability of Ethernet, in comparison to legacy technologies used for metro area networks, have driven significant new Ethernet-based MAN deployments that will continue to accelerate.

The Switch 8800 supports long range optical lasers on its Gigabit and 10-Gigabit Ethernet Modules for linking Switch 8800s across the metro area, as well as technologies like “Q-in-Q” encapsulation (VLAN VPN), and MPLS for creating IP-VPNs.

## FEATURES

Highly flexible, resilient architecture for end-to-end enterprise deployment in the core, data center, distribution layer, and network edge.

High-density multilayer switching for Gigabit and 10-Gigabit Ethernet.

Up to 576 Gigabit or 48 10-Gigabit Ethernet ports.

720 Gbps system bandwidth; up to 428 Mpps switching capacity.

Advanced traffic prioritization and routing of multicast traffic in hardware for convergent applications including voice over IP, streaming audio, and video.

Virtually non-stop operation with redundant power supplies, fans, and switch fabrics, as well as hot-swappable switching I/O modules.

Robust network access control and enterprise-wide security via standards-based IEEE 802.1X, RADIUS and MAC-based authentication, and advanced Access Control Lists, as well as authentication and encryption of management traffic.

Industry-standard Power over Ethernet to power IP phones, wireless access points, and other devices; reduces implementation and maintenance costs.


Unifies management and administration with a common operating system and centralized control available via 3Com Enterprise Management Suite.

Granular QoS and traffic management for enhanced availability and performance of critical business applications.


Extensive L2/3/4 switching and routing capability, including advanced features\* like IS-IS, BGP-4, and MPLS, applicable in very large enterprises.

\* Available in the 3Com Advanced Feature Software, at additional cost

## SAMPLE CONFIGURATION A: CORE-TO-EDGE DEPLOYMENT OF SWITCH 8800 FAMILY IN ENTERPRISE CAMPUS NETWORK

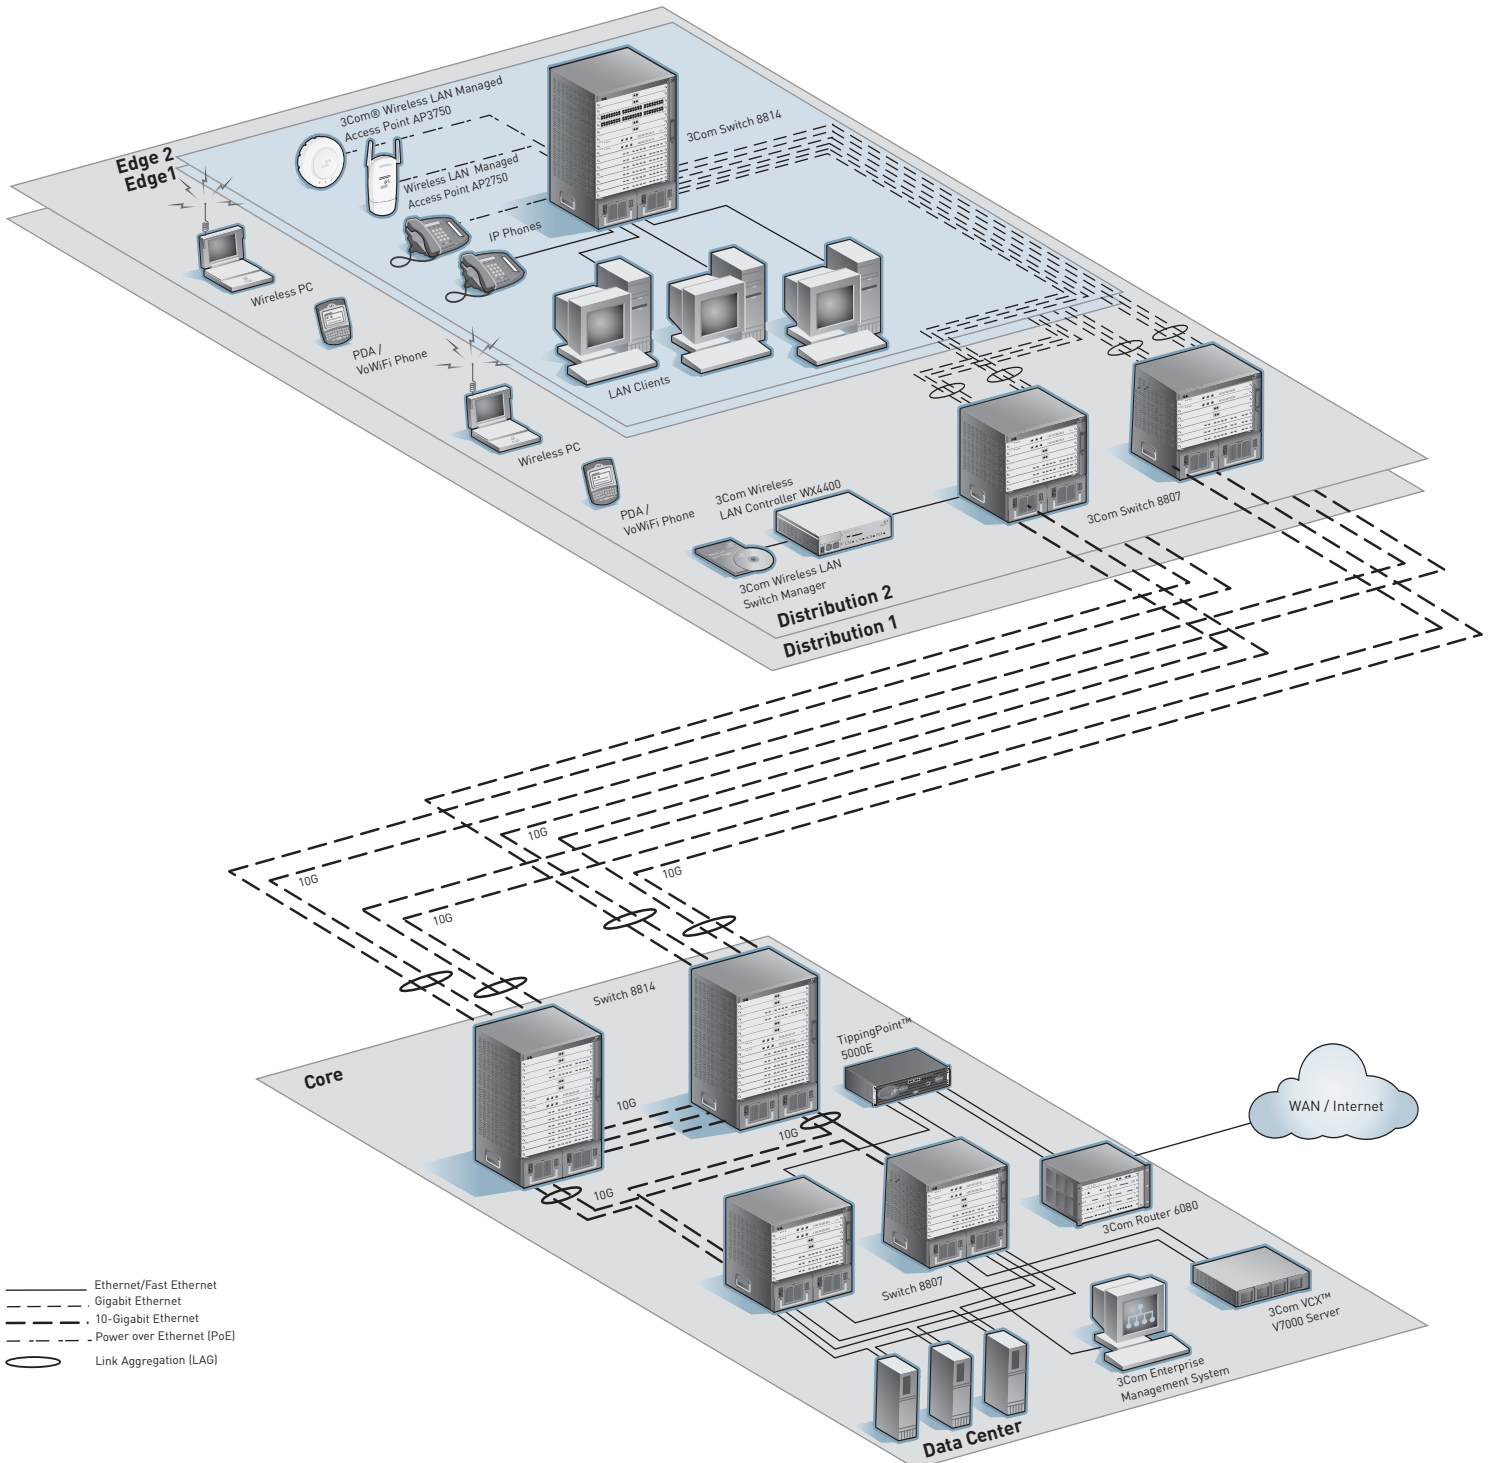

## SAMPLE CONFIGURATION B: CORE / DATA CENTER DEPLOYMENT OF SWITCH 8800 FAMILY IN ENTERPRISE CAMPUS NETWORK

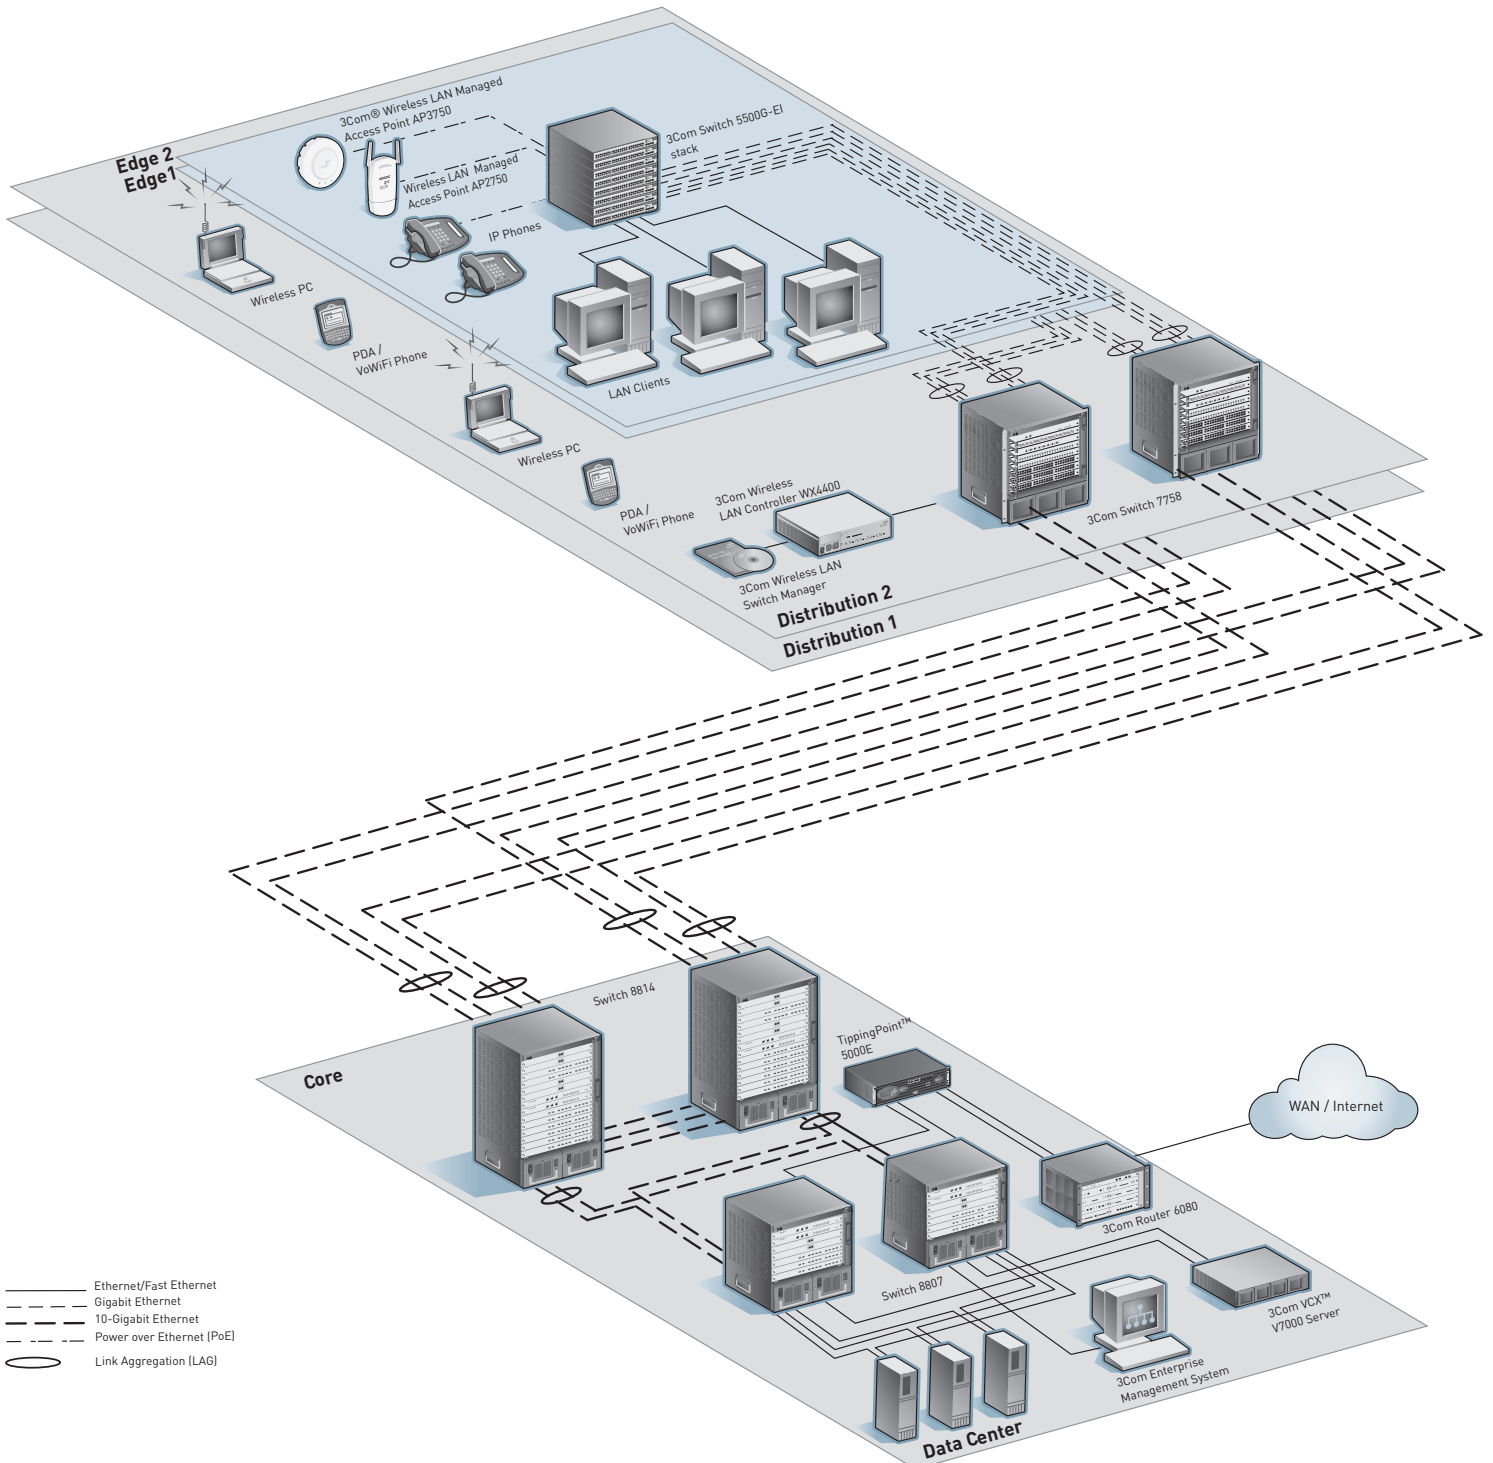

## SPECIFICATIONS

All information in this section is relevant to all members of the 3Com Switch 8800 Family, unless stated otherwise.

### CAPACITIES AND PERFORMANCE

#### Switch 8814:

Two slots for switch fabrics; twelve payload slots

Backplane: 1.44 Tbps, max

Bandwidth:

- 720 Gbps, max (dual fabrics)
- 360 Gbps, max (single fabric)

Throughput, aggregate: 428 Mpps, max

#### Switch 8810:

Two slots for switch fabrics; eight payload slots

Backplane: 960 Gbps, max

Bandwidth:

- 480 Gbps, max (dual fabrics)
- 240 Gbps, max (single fabric)

Throughput, aggregate: 286 Mpps, max

#### Switch 8807:

Two slots for switch fabrics; five payload slots

Backplane: 600 Gbps, max

Bandwidth:

- 300 Gbps, max (dual fabrics)
- 150 Gbps, max (single fabric)

Throughput, aggregate: 179 Mpps, max

### LAYER 2 SWITCHING

12K MAC addresses per I/O module;

64 K MAC addresses per system

5K Static MAC addresses

Modules forwarding (delay <10µs)

4096 VLANs (IEEE 802.1Q)

Port-based (IEEE 802.1Q) and protocol-based (IEEE 802.1v) VLANs

Dynamic VLAN assignment capability based on user/device authentication

GVRP (GARP VLAN Registration Protocol)

IEEE 802.3ad Link Aggregation, with support for aggregation groups across modules

Maximum 31 link aggregation groups of eight ports each

Auto-negotiation of port speed and duplex

IEEE 802.3x full-duplex flow control  
Back pressure flow control for half-duplex

Broadcast storm suppression per VLAN

IEEE 802.1D Spanning Tree Protocol (STP)

IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)

IEEE 802.1S Multiple Spanning Tree Protocol instances (MSTP)

Single STP instance

BPDU (Bridge Protocol Data Unit) protection

Jumbo Frames (up to 10k bytes)

Protocol-based VLANs

Super VLAN (VLAN Aggregation, RFC 3069)

Q-in-Q Tagging (VLAN VPN)

### LAYER 3 SWITCHING

Hardware based routing

128K routes; 256k routes on Advanced

Routing Modules<sup>†</sup>

5K static routes

4K dynamic / static ARP (Address Resolution Protocol) entries

1K IP interfaces

RIP (Routing Information Protocol), v1 and v2, 2K routes; supports Split Horizons

OSPF (Open Shortest Path First), v1 and v2, 80K entries; 128k routes on Advanced Routing Modules<sup>†</sup>

ECMP (Equal Cost Multi-Path) for OSPF  
BGP4 (Border Gateway Protocol)\*, 128K routes; 256k routes on Advanced Routing Modules<sup>†</sup>

IS-IS (Intra-Domain Intermediate System to Intermediate System)\*, 15K routes

Hardware-based multicast routing for wirespeed performance

4K multicast routes; 256 groups

IGMP (Internet Group Management Protocol) snooping on Layer 2 interfaces

IGMP v1 and v2

GMRP (GARP Multicast Registration Protocol)

PIM-DM (Protocol Independent Multicast-Dense Mode)

PIM-SM (Protocol Independent Multicast-Sparse Mode)

MSDP (Multicast Source Discovery Protocol)

Multiple multicast static addresses to support Microsoft ISA and other firewalls

DHCP Relay (Dynamic Host Configuration Protocol Relay)

TCP/IP protocol stack

ARP

IPv6 ready

MPLS (Multiprotocol Label Switching), with Layer 3 VPN, Label Distribution Protocol (LDP), and Multiprotocol BGP (MBGP) on Advanced Routing Modules\*

VRRP (Virtual Router Redundancy Protocol): 256 virtual routers per switch; each virtual router supports 16 IP addresses

### CONVERGENCE

Eight hardware queues per port

Flow-based QoS profiles

Ingress and egress

Remarking of packets based on priority:

- Selectable prioritization
- DSCP (Diffserv Code Point)
- Type of Service (ToS)
- IEEE 802.1p Class of Service (CoS)
- IP precedence

• Local precedence: physical port, source/destination MAC address, VLAN information, Ethernet type, Layer 3 protocol, source/destination IP address, DSCP, datagram type, IP Layer 4 protocol, IP Layer 4 ports

Flow-based bandwidth management

Flows identified through Access Control Lists (ACLs)

Configurable bandwidth granularity

Random Early Detect/Discard (RED)

Queuing algorithms

Strict Priority Queuing

WRR (Weighted Round Robin) provided through bandwidth management

IEEE 802.3af Power over Ethernet

(PoE) support on 10/100/1000 ports

### SECURITY

Network login with IEEE 802.1X user authentication

Local authentication and RADIUS authentication

TACACS+ (Terminal Access Controller Access Control System Plus) authentication\*

Automatic assignment of VLAN based on user/device authentication

Wirespeed packet filtering in hardware Supports a maximum of 12K ACL rules per system; 1K ACL rules per module

ACLs filter at Layers 2, 3, and 4:

- physical port
- source/destination MAC address
- VLAN information
- Ethernet type
- Layer 3 protocol
- source/destination IP address
- DSCP
- datagram type
- IP Layer 4 protocol
- IP Layer 4 ports

MD5 cipher-text authentication and clear-text authentication for OSPF v2 and RIP v2 packets and SNMP v3 traffic

Protection against denial of service (DoS) attacks which exploit protocols including IP, ARP, and 802.1X/EAP

IEEE 802.1X user authentication on switch Telnet sessions

Hierarchical management and password protection for management interface

Encrypted management traffic using SSH v2\* and SNMP v3\*

<sup>†</sup> Support for 256k routes requires optional 1Gb memory upgrade kit (3C17518)

\* Available in the 3Com Advanced Feature Software, at additional cost

## SPECIFICATIONS (CONTINUED)

### MANAGEMENT

CLI (Command Line Interface) configuration mode  
 Configuration via the console (control console) port  
 Local/remote configuration via Telnet  
 Remote configuration via modem dial-up  
 System configuration with SNMP v1, 2, and 3\*  
 Comprehensive statistics  
 Port mirroring (one-to-one and many-to-one), supported across modules  
 RMON (Remote Monitoring) groups: statistics, history, alarm, and events  
 ACL/QoS and IP interface statistics  
 System log  
 Syslog  
 Detailed alarm/debug information  
 Hierarchical alarms  
 Alarm generation and filtering  
 Statistics  
 Ping and Traceroute  
 Network Time Protocol (NTP)  
 Configuration file for backup and restore  
 System file transfer mechanisms: Xmodem, FTP, TFTP

### GRAPHICAL MANAGEMENT

3Com Enterprise Management Suite for flexible, extensible management in advanced enterprise IT environments  
 3Com Network Director for comprehensive, turn-key network management for the enterprise; includes 3Com Switch Manager application for GUI-based management of Switch 8800 systems  
 3Com Network Supervisor for basic, turn-key network management for small and medium businesses

### CONNECTIVITY

Mix and match technologies and media types in available payload slots:  
 1-port 10GBASE-X (XENPAK) module  
 1-port, 2-port, and 4-port 10GBASE-X (XFP) modules  
 12-port and 24-port 1000BASE-X (SFP) modules  
 24-port and 48-port 10/100/1000BASE-T (RJ-45) modules

### DIMENSIONS

**Switch 8814:**  
 Height: 75.3 cm (29.6 in)  
 Width: 43.6 cm (17.2 in)  
 Depth: 48.0 cm (18.9 in)  
 Weight (fully loaded chassis): <120 kg (265 lbs)

**Switch 8810:**  
 Height: 61.9 cm (24.4 in)  
 Width: 43.6 cm (17.2 in)  
 Depth: 48.0 cm (18.9 in)  
 Weight (fully loaded chassis): <80 kg (176 lbs)

**Switch 8807:**  
 Height: 48.6 cm (19.1 in)  
 Width: 43.6 cm (17.2 in)  
 Depth: 48.0 cm (18.9 in)  
 Weight (fully loaded chassis): <65 kg (143 lbs)

### POWER SUPPLY

**1,200 W AC Power Supply:**  
 Input voltage: 100-240 VAC auto-ranging  
 Operating frequency: 47-63 Hz  
 Maximum current: 13.6 A at 110 VAC; 6.8 A at 200 VAC  
 Maximum output power: 1,200 Watts  
 Maximum input power: 1,500 Watts

**2,000 W AC Power Supply:**  
 Input voltage: 100-140 or 200-240 VAC auto-ranging  
 Operating frequency: 47-63 Hz  
 Maximum current: 11.4 A at 110 VAC; 11.4 A at 200 VAC  
 Maximum output power: 1,000 Watts at 110 V; 2,000 Watts at 220 V  
 Maximum input power: 1,250 Watts at 110 V; 2,500 Watts at 220 V

#### Maximum power consumption:

Switch 8814: 1,620 Watts  
 Switch 8810: 1,130 Watts  
 Switch 8807: 760 Watts

### ENVIRONMENTAL REQUIREMENTS

Operating temperature:  
 0° to 40°C (32° to 104°F)  
 Storage temperature:  
 -10° to 70°C (14° to 158°F)  
 Humidity (operating and storage):  
 10% to 90% non-condensing

#### Heat dissipation:

Switch 8814: 5,529 BTU/hr  
 Switch 8810: 3,857 BTU/hr  
 Switch 8807: 2,594 BTU/hr

### MTBF

Switch 8807 / 8814 Fan Assembly (3C17503): 16 years (140,000 hours)  
 Switch 8810 Fan Assembly (3C17504): 13 years (114,000 hours)  
 Switch 8800 1,200W AC Power Supply (3C17506A): 17 years (150,000 hours)  
 Switch 8800 2,000W AC Power Supply (3C17507A): 17 years (150,000 hours)  
 Switch 8800 360 Gbps Fabric (3C17508): 28 years (241,000 hours)  
 Switch 8800 1-Port 10GBASE-X Module (3C17511): 20 years (175,000 hours)  
 Switch 8800 2-Port 10GBASE-X Module (3C17512): 34 years (295,000 hours)  
 Switch 8800 12-Port 1000BASE-X Module (3C17513): 58 years (504,000 hours)  
 Switch 8800 24-Port 1000BASE-X Module (3C17514): 43 years (380,000 hours)  
 Switch 8800 24-Port 10/100/1000BASE-T Module (3C17516): 35 years (304,000 hours)  
 Switch 8800 1-Port 10GBASE-X (XENPAK) Advanced Module (3C17525): 33 years (289,000 hours)  
 Switch 8800 4-Port 10GBASE-X (XFP) Module (3C17526): 26 years (228,000 hours)  
 Switch 8800 2-Port 10GBASE-X (XFP) Advanced Module (3C17527): 40 years (350,000 hours)  
 Switch 8800 48-Port 10/100/1000BASE-T Module (3C17528): 34 years (295,000 hours)

Switch 8800 24-Port 1000BASE-X (SFP) Advanced Module (3C17530): 35 years (305,000 hours)  
 Switch 8800 24-Port 10/100/1000BASE-T Advanced Module (3C17531): 35 years (305,000 hours)  
 Switch 8800 48-Port 10/100/1000BASE-T Access Module (3C17532): 36 years (315,000 hours)

### IEEE STANDARDS SUPPORTED

IEEE 802.1D (STP)  
 IEEE 802.1p (CoS)  
 IEEE 802.1Q (VLANs)  
 IEEE 802.1S (MSTP)  
 IEEE 802.1v (VLANs)  
 IEEE 802.1w (RSTP)  
 IEEE 802.1X (Security)  
 IEEE 802.3ad (Link Aggregation)  
 IEEE 802.3ab (1000BASE-T)  
 IEEE 802.3ae (10G Ethernet)  
 IEEE 802.3af (Power over Ethernet)  
 IEEE 802.3i (10BASE-T)  
 IEEE 802.3u (Fast Ethernet)  
 IEEE 802.3x (Flow Control)  
 IEEE 802.3z (Gigabit Ethernet)

### IETF STANDARDS

RFC 768 (UDP)  
 RFC 783/1350 (TFTP)  
 RFC 791/1349 (IP)  
 RFC 792/950 (ICMP)  
 RFC 793 (TCP)  
 RFC 826 (ARP)  
 RFC 919/ 922 (Broadcasting Internet Datagrams)  
 RFC 950 (Internet Standard Subnetting Procedure)  
 RFC 951 (BOOTP)  
 RFC 958 (SNTP)  
 RFC 959/ 2228/ 2640 (FTP)  
 RFC 1058 (RIP v1)  
 RFC 1112 (IGMP v1)  
 RFC 1142 (OSI IS-IS Intra-domain Routing Protocol)\*  
 RFC 1155 (Structure and Identification of Management Information for TCP/IP-based Internets)  
 RFC 1195 and ISO10589-1992 (IS-IS)\*  
 RFC 1256 (ICMP Router Discovery Messages)  
 RFC 1518/ 1519 (CIDR)  
 RFC 1542/ 2132/ 3442 (DHCP)  
 RFC 1587/ 3101 (OSPF NSSA option)  
 RFC 1723/ 2453/ (RIP v2)  
 RFC 1765 (OSPF Database Overflow)  
 RFC 1771 (BGP-4)\*  
 RFC 1772 (BGP-4 Applicability)\*  
 RFC 1812/ 2644 (IP v4)  
 RFC 1965/ 3065 (BGP AS Confederations)\*  
 RFC 1997/ 1998 (BGP Communities Attributes)\*  
 RFC 2131/3396 (DHCP)  
 RFC 2138/ 2865/ 2868/ 3575 (RADIUS Authentication)  
 RFC 2139/ 2866/ 2867 (RADIUS Accounting)

\* Available in the 3Com Advanced Feature Software, at additional cost

## SPECIFICATIONS (CONTINUED)

### IETF STANDARDS, CONTINUED

RFC 2236 (IGMP v2)  
 RFC 2267/ 2827/ 3704 (Network Ingress Filtering)  
 RFC 2328 (OSPF v2)  
 RFC 2338/ 3768 (VRRP)  
 RFC 2362 (PIM-SM)  
 RFC 2370/ 3630 (OSPF Opaque LSA Option)  
 RFC 2385 (BGP – MD5)\*  
 RFC 2439 (BGP Route Flap Damping)\*  
 RFC 2474/ 3168 (Diffserv)  
 RFC 2475 (Architecture for Differentiated Service)  
 RFC 2547, 3031, 3036 (MPLS)\*  
 RFC 2622 (Routing policy)  
 RFC 2644 (Change Default: Router Directed Broadcasts)  
 RFC 2715 (Interoperability: Multicast Routing Protocols)  
 RFC 2796 (BGP Route Reflection)\*  
 RFC 2918 (Route Refresh for BGP-4)\*  
 RFC 3168 (Explicit Congestion Notification (ECN))

### Management, including MIBs Supported

RFC 1155 (Structure and Mgmt Information (SMI v1))  
 RFC 1157 (SNMP v1/v2c)  
 RFC 1213/ 2011-2013 (MIB II)  
 RFC 1213, 1573 / 2233/ 2863 (MIB II)  
 RFC 1253/ 1850 (OSPF Version 2 MIB)  
 RFC 1493 (Bridge MIB)

RFC 1573/ 2233/ 2863 (Private IF MIB)  
 RFC 1657 (draft) (BGP4)\*  
 RFC 1724 (RIP Version 2 MIB Extension)  
 RFC 1850 (OSPF Version 2 MIB Extension)  
 RFC 1901-1907/ 2578-2580/ 3416-3418 (SNMP v2c, SMI v2 and Revised MIB-II)  
 RFC 2233/ 3376 (Interfaces MIB)  
 RFC 2271/ 2571 (FrameWork)  
 RFC 2571-2575/ 3411-3415 (SNMP v3)\*  
 RFC 2578-2580 (SMI v2)  
 RFC 2613 (Remote Network Monitoring MIB Extensions)  
 RFC 2618 (RADIUS Authentication Client MIB)  
 RFC 2620 (RADIUS Accounting Client MIB)  
 RFC 2665/ 3635 (Pause control)  
 RFC 2668/ 3636 (IEEE 802.3 MAU MIB)  
 RFC 2674 (VLAN MIB Extension)  
 RFC 2787 (VRRP MIB)  
 RFC 2819 (RMON MIB)

### EMISSIONS / AGENCY APPROVALS

CISPR 22 Class A  
 FCC Part 15 Class A  
 EN 55022 Class A  
 ICES-003 Class A  
 AS/NZS 3548 Class A  
 EN 61000-3-2  
 EN 61000-3-3

### IMMUNITY

Product conforms to:  
 EN 55024: 1998  
 EN 61000-4-2 to 61000-4-6, EN 61000-4-11

### SAFETY AGENCY CERTIFICATIONS

UL 60950  
 IEC 60950-1:2001; all national deviations  
 EN 60950-1: 2001; all deviations  
 CAN/CSA-C22.2 No. 60950-1-03  
 NOM-019 SCFL, Mexico; AS/NZ TS-001 and 60950: 2000, Australia

### FEATURES OF ADVANCED FEATURE SOFTWARE

SNMP v3 and SSH v2 encryption, with support for DES56 encryption; BGP4; IS-IS; TACACS+ authentication; MPLS

### WARRANTY

Limited Hardware Warranty for one year. Limited Software Warranty for ninety (90) days. See [www.3com.com/warranty](http://www.3com.com/warranty) for details.

\* Available in the 3Com Advanced Feature Software, at additional cost

## AGGREGATE SYSTEM CAPACITIES

	Switch 8814	Switch 8810	Switch 8807
<b>Chassis slots</b>			
Available slots (switch fabric and I/O)	14	10	7
<b>Performance</b>			
Switching capacity	428 Mpps	286 Mpps	179 Mpps
Fabric bandwidth:			
Single switch fabric	360 Gbps	240 Gbps	150 Gbps
Dual switch fabrics	720 Gbps	480 Gbps	300 Gbps
<b>Total port capacity</b>			
10-Gigabit Ethernet (XENPAK)	12	8	5
10-Gigabit Ethernet (XFP)	48	32	20
10-Gigabit Ethernet Advanced <sup>‡</sup> (XENPAK)	12	8	5
10-Gigabit Ethernet Advanced <sup>‡</sup> (XFP)	24	16	10
Gigabit Ethernet (10/100/1000)	576	384	240
Gigabit Ethernet PoE <sup>§</sup> (10/100/1000)	576	384	240
Gigabit Ethernet (SFP)	288	192	120
Gigabit Ethernet Advanced <sup>‡</sup> (10/100/1000)	288	192	120
Gigabit Ethernet Advanced <sup>‡</sup> (SFP)	288	192	120

<sup>‡</sup> Advanced Routing Modules have capacity for 256K routes and MPLS support (with optional 3Com Advanced Feature Software)

<sup>§</sup> Power over Ethernet (PoE) using 48-port 10/100/1000 Ethernet module; requires optional PoE components to be installed

---

## SERVICE AND SUPPORT

3Com Global Services offers the resources and talents of a major corporation plus more than two decades of experience in resolving network challenges and delivering business benefits to enterprises around the world.

Global support with a personalized, local focus helps drive productivity and minimize expenses. Because 3Com understands both the technology and the business, we're the partner you need to remain strong and competitive.

### Suggested Service, Support, and Training Offerings

Network Health Check	<p>An activity-auditing service focused on improving network performance and productivity</p> <p>Includes traffic monitoring, utilization analysis, problem identification, and asset deployment recommendations</p> <p>Extensive report provides blueprint for action</p>
Network Installation and Implementation Services	<p>Experts set up and configure equipment and integrate technologies to maximize functionality and minimize business disruption</p> <p>For large and complex sites, implementation services include personalized configuration, project management, extended testing, and coaching on network administration</p>
Project Management	<p>Provides extra focus and resources that special projects demand</p> <p>3Com engineer(s) manage entire process from initial specifications to post-project review</p> <p>Using structured methodology, requirements are identified, projects planned, and progress of implementation activities tracked</p>
3Com Guardian <sup>SM</sup> Maintenance Service	<p>This service provides comprehensive on-site support, and includes advance hardware replacement, telephone technical support, and software upgrades</p>
3Com Express <sup>SM</sup> Maintenance Service	<p>This service provides speedy access to 3Com shipment of advance hardware replacements, software upgrades, and telephone support</p>
3Com University	<p>Self-paced and instructor-led technology and product courses, plus certification programs</p>

For additional information, please visit [www.3com.com/services](http://www.3com.com/services)

## ORDERING INFORMATION

PRODUCT DESCRIPTION	3COM SKU
<b>Starter Kits</b>	
3Com Switch 8814 Starter Kit <i>(consisting of chassis, one power supply, two fan assemblies, and switch fabric)</i>	3C17500A-xx
3Com Switch 8810 Starter Kit <i>(consisting of chassis, one power supply, fan assembly, and switch fabric)</i>	3C17501A-xx
3Com Switch 8807 Starter Kit <i>(consisting of chassis, one power supply, fan assembly, and switch fabric)</i>	3C17502A-xx
<b>Modules</b>	
3Com Switch 8800 1-Port 10GBASE-X (XENPAK)	3C17511
3Com Switch 8800 1-Port 10GBASE-X (XENPAK) Advanced	3C17525
3Com Switch 8800 2-Port 10GBASE-X (XFP)	3C17512
3Com Switch 8800 2-Port 10GBASE-X (XFP) Advanced	3C17527
3Com Switch 8800 4-Port 10GBASE-X (XFP)	3C17526
3Com Switch 8800 12-Port 1000BASE-X (SFP)	3C17513
3Com Switch 8800 24-Port 1000BASE-X (SFP)	3C17514
3Com Switch 8800 24-Port 1000BASE-X (SFP) Advanced	3C17530
3Com Switch 8800 24-Port 10/100/1000BASE-T Advanced	3C17531
3Com Switch 8800 24-Port 10/100/1000BASE-T	3C17516
3Com Switch 8800 48-Port 10/100/1000BASE-T	3C17528
3Com Switch 8800 48-Port 10/100/1000BASE-T Access	3C17532
<b>Software</b>	
3Com Switch 8800 Advanced Feature Software	3CR1752193 V2
<b>Transceivers</b>	
3Com 1000BASE-SX SFP	3CSFP91
3Com 1000BASE-LX SFP	3CSFP92
3Com 1000BASE-T SFP	3CSFP93
3Com 1000BASE-LH70 (70km) SFP	3CSFP97
3Com 10GBASE-LR XENPAK	3CXENPAK92
3Com 10GBASE-ER XENPAK	3CXENPAK96
3Com 10GBASE-LR XFP	3CXFP92
3Com 10GBASE-SR XFP	3CXFP94
3Com 10GBASE-ER XFP	3CXFP96
<b>Power over Ethernet (PoE) Components</b>	
3Com Switch 8800 External PoE Power Rack	3C17509
3Com Switch 7750/8800 PoE Power Supply Unit	3C16884
3Com Switch 8800 PoE Option (PoE DIMM Module)	3C17529
3Com Switch 8800 PoE Entry Module	3C17510
<b>Spare Components</b>	
3Com Switch 8807 / 8814 Fan Assembly	3C17503
3Com Switch 8810 Fan Assembly	3C17504
3Com Switch 8800 1,200W AC Power Supply	3C17506A-xx
3Com Switch 8800 2,000W AC Power Supply	3C17507A-xx
3Com Switch 8800 360 Gbps Fabric	3C17508
3Com Switch 8800 1Gb Memory Upgrade	3C17518
<b>3Com Global Services</b>	
3Com Network Health Check, Installation Services, and Express Maintenance	<a href="http://www.3com.com/services_quote">www.3com.com/services_quote</a>
3Com University Courses	<a href="http://www.3com.com/3comu">www.3com.com/3comu</a>

For additional information, please visit [www.3com.com](http://www.3com.com)

Visit [www.3com.com](http://www.3com.com) for more information about 3Com secure converged network solutions.

3Com Corporation, Corporate Headquarters, 350 Campus Drive, Marlborough, MA 01752-3064  
3Com is publicly traded on NASDAQ under the symbol COMS.

Copyright © 2006 3Com Corporation. All rights reserved. 3Com and the 3Com logo are registered trademarks, and TippingPoint and VCX are trademarks, of 3Com Corporation or one of its subsidiaries. All other company and product names may be trademarks of their respective companies. While every effort is made to ensure the information given is accurate, 3Com does not accept liability for any errors or mistakes which may arise. All specifications are subject to change without notice.

400884-010 02/06

